



Professional AC, AC/DC Digital Clamp Meters



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031



1000A True RMS

3366/3368 Professional True RMS 1000A AC, AC/DC Clamp Meters provide accurate Inrush current measurement.

- 6600 counts digital LCD display with backlit
- 1.2" (30mm) Clamp jaw opening
- Inrush current measurement
- Type K temperature measurement
- Data hold function
- DCA Zero function
- Over-range indication
- Low battery indication
- Auto Power Off

Inrush current measurement



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031

Features

	3366	3368
Inrush current function	*	*
True RMS AC Voltage and Current	*	*
1.2"(30mm) Clamp Digital display	*	*
Electronic overload protection	*	*
Continuity buzzer & Diode check	*	*
Data Hold function	*	*
DCA Zero function	*	*
Auto Power Off	*	*
Low battery indication	*	*
AC/DC Current	AC current	*

Specifications

Function	Max Range	Max. Resolution	Basic Accuracy	3366	3368
AC Current	1000 A	0.1A	±(2.5%+5d)	*	*
DC Current	1000 A	0.1A	±(2.8%+4d)	*	*
AC Voltage	600V	0.1mV	±(1.0%+2d)	*	*
DC Voltage	600V	0.1mV	±(0.8%+4d)	*	*
Resistance	40MΩ	0.1Ω	±(1.0%+4d)	*	*
Frequency	10MHz	0.01MHz	±(1.2%+3d)	*	*
Capacitance	40mF	0.01mF	±(3.0%+3d)	*	*
Duty Cycle	10.0 to 94.9%	0.1%	±(1.2%+3d)	*	*
Temperature	760°C/1400°F	1°C/°F	±(3.0%+5d)	*	*
Inrush current	1000A	0.1A	±(2.0%+5d)	*	*
Continuity check	Threshold 40Ω, test current <0.5mA				
Diode test	test current of 0.3mA typical, open circuit voltage <3V DC typical				

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

Accessories:

Test leads, gift box with carrying case & 9V battery



Double molded housing

1000A Clamp Meters

3360/3361/3363/3367 series professional 1000A AC, AC/DC clamp meters provide multi-function for 1000A AC, AC/DC, voltage, resistance, capacitance, Frequency, Temperature, duty cycle and continuity. These series are with 6000 counts digital LCD display and analog bargraph.



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031



- 6000 counts digital LCD display
- Analog Bargraph/Segments
- Electronic overload protection
- Continuity buzzer & diode check
- Data hold function
- DCA Zero function
- Max/Min function
- Low battery indication
- Auto power off
- True RMS measurement(DT-3367)

Features

	3360	3361	3363	3367
Digital display counts	6000	6000	6000	6000
Electronic overload protection	*	*	*	*
Continuity buzzer & Diode check	*	*	*	*
Data Hold function	*	*	*	*
DCA Zero function			*	*
Min/Max Hold function	*	*	*	*
Auto Power Off	*	*	*	*
Low battery indication	*	*	*	*
AC/DC Current			*	*
True RMS measurements				*

Specifications

Function	Max Range	Basic Accuracy	Max. Resolution	3360	3361	3363	3367
DC Current	1000A	±(2.5%+5d)	1mA			*	*
AC Current	1000A	±(3.0%+4d)	10mA	*	*	*	*
DC Voltage	600V	±(0.8%+2d)	0.1mV	*	*	*	*
AC Voltage	600V	±(1.0%+4d)	0.1mV	*	*	*	*
Resistance	60MΩ	±(1.0%+4d)	0.1Ω	*	*	*	*
Capacitance	1000μF	±(3.0%+5d)	0.01nF	*	*	*	*
Frequency	10MHz	±(1.2%+3d)	0.001Hz	*	*	*	*
Duty Cycle	99.9%	±(1.2%+3d)	0.1%	*	*	*	*
Temperature	1000°C/1832°F	±(3.0%+3d)	0.1°C/°F		*	*	*

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

Accessories:

Test leads, gift box with carrying case & 9V battery

Temperature probe(3361/3363/3367)

DT-3343T/3344/3345/3347

1000A AC, AC/DC True RMS Clamp Meters

CEM

www.cem-meter.com.cn

1000A True RMS

Peak Hold Function

3343T/3344/3345/3347 Series Professional True RMS Clamp Meters provide accurate AC, AC/DC Current and Voltage readings regardless of waveforms. These meters can be used in most industrial and commercial applications where non-linear loads distort the Current or Voltage waveform.

EN
61010-1
CATIII
600V

- Double molded housing
- Electronic overload protection
- Auto Power Off

CE

EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031



Features

	3343T	3344	3345	3347
True RMS measurements	*	*	*	*
Digital display counts	4000	4000	4000	4000
Electronic overload protection	*	*	*	*
Analog Bargraph/segments	*	*/41	*/41	*/41
Continuity buzzer & Diode check	*	*	*	*
Data Hold function	*	*	*	*
Peak Hold function	*	*	*	*
DCA Zero function	*	*	*	*
Auto Power Off	*	*	*	*
Low battery indication	*	*	*	*
AC/DC Current	*	AC Current	AC Current	*

Specifications

Function	Max Range	Basic Accuracy	Max. Resolution	3343T	3344	3345	3347
AC Current	1000 A	±(2.5%+5d)	10mA	*	*	*	*
DC Current	1000 A	±(3.0%+4d)	10mA	*	*	*	*
AC Voltage	600V	±(0.8%+2d)	0.1mV	*	*	*	*
DC Voltage	600V	±(1.0%+4d)	0.1mV	*	*	*	*
Resistance	40MΩ	±(1.0%+4d)	0.1Ω	*	*	*	*
Capacitance	40mF	±(3.0%+5d)	0.01nF	100μF	*	*	*
Frequency	10MHz	±(1.2%+3d)	0.01MHz	*	*	*	*
Temperature	1000°C/1832°F	±(3.0%+5d)	1°C/°F	*	*	*	*

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

Accessories:

Test leads, gift box with carrying case, 9V battery and Temperature probe (3343T/3345/3347)





Double molded housing

1000A Clamp Meters

3340/3341/3342/3343 Series Professional AC, AC/DC Clamp Meters provide many functions for professional AC, AC/DC measurements including resistance, capacitance and diode test, etc. With mid- size and tear-drop shaped jaw, it is easy to use in crowded cable areas and other tight places.



EMC & LVD

EN: 50081-1, 50082-1

EN: 61010-1, EN: 61010-02-031

Features

	3340	3341	3342	3343
Digital display counts	2000	4000	2000	4000
Electronic overload protection	*	*	*	*
Continuity buzzer & Diode check	*	*	*	*
Data Hold function	*	*	*	*
DCA Zero function				*
MAX Hold function	*		*	
Auto Power Off	*	*		*
Low battery indication	*	*		*
AC/DC Current				*

Specifications

Function	Max Range	Basic Accuracy	Max. Resolution	3340	3341	3342	3343
DC Current	1000A	$\pm(2.5\%+5d)$	1mA				*
AC Current	1000A	$\pm(3.0\%+4d)$	10mA	*	*	*	*
DC Voltage	600V	$\pm(0.8\%+2d)$	0.1mV	*	*	*	*
AC Voltage	600V	$\pm(1.0\%+4d)$	0.1mV	*	*	*	*
Resistance	20M Ω	$\pm(1.0\%+4d)$	0.1 Ω	*		*	
	40M Ω	$\pm(1.0\%+4d)$	0.1 Ω		*		*
Capacitance	100.0nF	$\pm(3.0\%+5d)$	0.01nF		*		*
Frequency	10MHz	$\pm(1.2\%+3d)$	0.001Hz		*		
	20kHz	$\pm(1.2\%+3d)$	0.01kHz			*	
	100kHz	$\pm(1.2\%+3d)$	0.001Hz				*
Duty Cycle	99.9%	$\pm(1.2\%+3d)$	0.1%		*	*	*
Temperature	1000°C/1832°F	$\pm(3.0\%+3d)$	0.1°C/°F		*		*

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

Accessories:

Test leads, gift box with carrying case & 9V battery, two "AAA" batteries(3340)

Temperature probe(3341/3343)



1000A True RMS

3348 Professional True RMS 1000A AC/DC Watt Clamp Meter provides accurate Watt, AC/DC Current and Voltage readings regardless of waveforms.

DC/AC True Power to 240kW

- Double molded housing
- Auto Power Off



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031



Features

True RMS AC Voltage and Current
DC and AC True Power to 240kW
1.2"(30mm) Clamp Digital display
Electronic overload protection
Continuity buzzer & Diode check
Data Hold function
DCA Zero function
Auto Power Off
Low battery indication
AC/DC Current

Specifications

Function	Max Range	Max. Resolution	Basic Accuracy
AC Current	1000 A	0.1A	±(2.5%+5d)
DC Current	1000 A	0.1A	±(3.0%+4d)
AC Voltage	600V	0.1mV	±(0.8%+2d)
DC Voltage	600V	0.1mV	±(1.0%+4d)
Resistance	40MΩ	0.1Ω	±(1.0%+4d)
Frequency	10MHz	0.01MHz	±(1.2%+3d)
AC Power	240kW	10W	±(3.0%+5d)
DC Power	240kW	10W	±(2.5%+5d)

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

Accessories:

Test leads, gift box with carrying case & 9V battery





Compact AC, AC/DC Digital Clamp Meters



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031

DT-360/361/362/363/366

Compact AC, AC/DC Autoranging Clamp Meters

CEM

www.cem-meter.com.cn

The 360 series clamp meters offer all the features you need to fit the way you work. The small bodies and jaws fit perfectly in your hand and into tight places. Meter controls are positioned so that current measurements can be done with one hand. A large backlit display (on most models) is easy to see and a handy Display Hold keeps measurements on the display. Measuring starting current for motors, lighting, etc. is easy with the inrush current function (on most models).

- Double molded plastic housing
- Inrush current function (366)
- Auto Power Off

Inrush current (366)

True RMS (363/366)

Features					
	360	361	362	363	366
Max. Resolution to Current measurement	AC 1mA	AC 1mA	AC/DC 10mA	AC/DC 10mA	AC/DC 10mA
LCD display counts	2000	4000	4000	4000	6000
AC True RMS				*	*
Display with backlight	*	*	*	*	*
Data Hold	*	*	*	*	*
Max Hold	*				*
Zero Function			*	*	*
Auto Power Off	*	*	*	*	*
Low battery indication	*	*	*	*	*
AC/DC Current			*	*	*
Peak Current				*	
Inrush Current					*

Specifications							
Function	Max Range	Basic Accuracy	360	361	362	363	366
Voltage DC	600V	±(0.5%+1d)	*	*	*	*	*
Voltage AC	600V	±(1.5%+2d)	*	*	*	*	*
Current DC	400A	±(2.0%+5d)			*	*	600A
Current AC	400A	±(2.5%+4d)	*	*	*	*	*
Resistance	60MΩ	±(3.0%+5d)	20MΩ	40MΩ	40MΩ	40MΩ	*
Temperature	1000°C/ 1832°F	±(3.0%+3d)		*		*	*
Capacitance	100uF	±(2.5%+5d)			*	40mF	60mF
Frequency	10MHz	±(1.2%+2d)			*	*	*
Inrush Current	600A	±(1.5%+2d)					*
Continuity check	Buzzer sounds at 50Ω		*	*	*	*	*
Diode test	Test current 0.3mA		*	*	*	*	*

Size(HxWxD): 197mm x 70mm x 40mm

Weight: 183g

Accessories:

Test leads, gift box with carrying case, Temperature probe(361, 363, 366 only) and 9V battery.



EMC & LVD

EN: 50081-1, 50082-1

EN: 61010-1, EN: 61010-02-031





3 in 1 Mini AC, AC/DC Clamp Meters



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031

FC-31/32/33/35

3 in 1 Mini AC, AC/DC Clamp Meters



www.cem-meter.com.cn

FC-35 includes function: A,V, Ω, Diode and Continuity

The FC-31/32/33/35 Series are designed to verify the presence of load current, Non-contact Voltage and Flashlight, etc. The small bodies and jaws fit perfectly in your hand and a large backlit display is easy to read.

- Non-Contact Voltage Detector
- Flashlight
- Digital Clamp Meter



Rubber Protection



EMC & LVD

EN: 50081-1, 50082-1

EN: 61010-1, EN: 61010-02-031

Features	31	32	33	35
AC/DC Voltage, Resistance, Continuity, Diode check				*
Digital display counts	2000	2400	2400	2000
Jaw opening	0.7"	0.7"	0.7"	0.7"
Non-contact Voltage detector and Flashlight	*	*	*	*
Non-contact Frequency measurements		*		
AC/DC Current		*	*	
AC/DC Leakage Current Tester			*	
Data Hold function	*	*	*	
MAX Hold function	*			*
DCA Zero function		*	*	
Auto Power Off	*	*	*	*
Low battery indication	*	*	*	*
Backlight Display		*	*	*

Specifications				31	32	33	35
AC Current	2A	±(3.0%+8d)	1mA			*	
	20A	±(3.0%+8d)	10mA	*			
	80A	±(3.0%+8d)	100mA			*	
	200A	±(3.0%+8d)	100mA	*	*		*
DC Current	2A	±(2.8%+8d)	1mA			*	
	80A	±(2.8%+8d)	100mA			*	
	200A	±(3.0%+8d)	100mA	*	*		
Frequency	40~51Hz	±(1.2%+5d)	0.01Hz		*		
	51~510Hz	±(1.2%+3d)	0.1Hz		*		
	0.51~1kHz	±(1.2%+3d)	0.001kHz		*		
Voltage DC	600V	±(0.5%+1d)	0.1mV				*
Voltage AC	600V	±(1.5%+2d)	0.1mV				*
Resistance	20MΩ	±(3.0%+5d)	0.1Ω				*
Continuity	Buzzer sounds at 100Ω						*
Diode	Open circuit voltage 1.5V, Test current 0.3mA						*
Non-contact Voltage detection	: 100~600VAC			*	*	*	*

Size(HxWxD): FC-31/32/33: 164mm x 65mm x 32mm
FC-35: 178mm x 65mm x 32mm

Weight: FC-31/32/33: 151g
FC-35: 170g

Accessories:

Test leads (FC-35), clamshell with carrying case, and Two (AAA)1.5V batteries.



High Resolution



Features


- Jaw opens to 0.5"
- 1mA high resolution
- Digital clamp tester for AC/DC current measurement
- Providing wide measuring range from very small to large current
- Designed to safety standard IEC 61010-2-032: CAT.III, 600V and pollution degree 2.
- Data hold and Max hold function
- Dynamic range of 4000 counts full scale
- Auto power off

Specifications

Function	Range	Min Resolution	Basic Accuracy
Current AC	4A, 80A	1mA	±(2.5%+5d)
Current DC	4A, 80A	1mA	±(2.5%+4d)
Voltage AC	400mV~600V	0.1mV	±(2.0%+4d)
Voltage DC	400mV~600V	0.1mV	±(1.5%+3d)
Resistance	400Ω~40MΩ	0.1Ω	±(1.5%+2d)
Frequency	5Hz~10MHz	0.001Hz	±(1.2%+3d)
% Duty	5%~99.9%	0.1%	±(1.2%+3d)
Diode Check	Test current of 0.3mA, Open circuit voltage 1.5V		
Continuity Check	Threshold 50Ω, continuity beeper 2.7kHz		

Size(HxWxD): 210mm x 70mm x 37mm

Weight: 200g

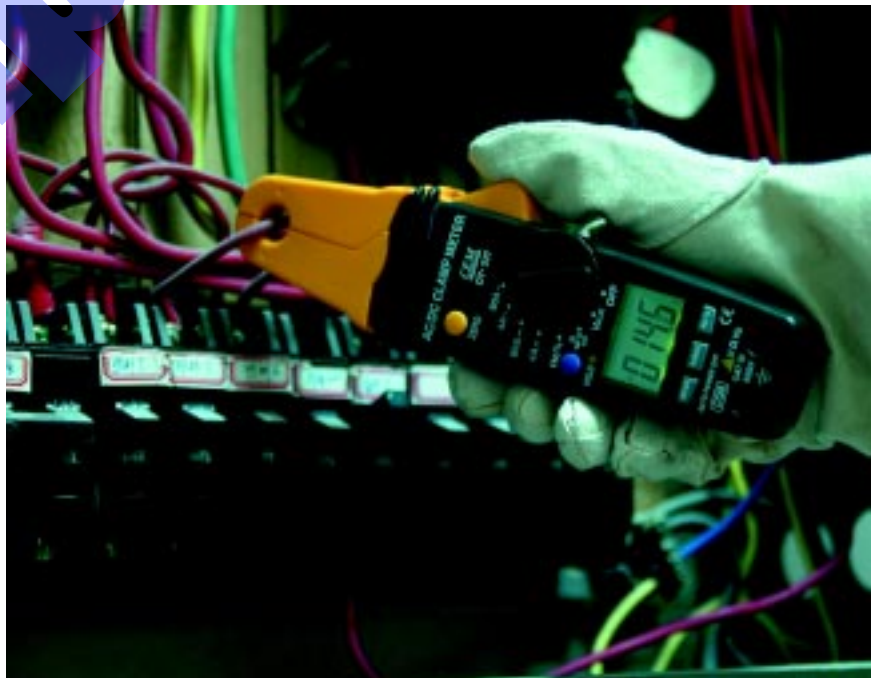

EMC & LVD
 EN: 50081-1, 50082-1
 EN: 61010-1,
 EN: 61010-02-031

Accessories:

Test leads, Gift box with carrying case, 9V battery.

DT-330 Series

Mini AC, AC/DC Autoranging Clamp Meters




www.cem-meter.com.cn

The 330 series are designed to verify the presence of load current, voltage and resistance, etc. The small bodies and jaws fit perfectly in your hand and a large backlit display is easy to read.

- Test lead μA range with high $0.1\mu\text{A}$ resolution for HVAC and Process control applications (335/336 only)
- Data Hold freeze the displayed value
- Auto Power Off

Features						
	330	331	332	333	335	336
			332T	333T		
Max. Resolution to Current measurement	AC 1mA	AC 1mA	AC/DC 10mA	AC/DC 10mA	AC/DC 0.1 μA	AC/DC 0.1 μA
LCD display counts	2000	2000				
			4000	4000	4000	4000
AC True RMS			332T	333T		
Display with backlight	*	*	*	*	*	*
Data Hold	*	*	*	*	*	*
Max Hold	*	*				
Zero Function			*	*	*	*
Auto Power Off	*	*	*	*	*	*
Low battery indication	*	*	*	*	*	*
AC/DC Current			*	*		



EMC & LVD

EN: 50081-1, 50082-1

EN: 61010-1, EN: 61010-02-031



Specifications								
Function	Max Range	Basic Accuracy	330	331	332	333	335	336
Voltage DC	600V	$\pm(0.5\%+1d)$	*	*	*	*	*	*
Voltage AC	600V	$\pm(1.5\%+2d)$	*	*	*	*	*	*
Current DC	400A	$\pm(2.5\%+5d)$			*	*		
Current AC	400A	$\pm(3.0\%+4d)$	*	*	*	*	*	*
Resistance	20M Ω	$\pm(3.0\%+5d)$	*	*	*	*	*	*
Temperature	1000°C/ 1832°F	$\pm(3.0\%+3d)$		*		*	*	
Capacitance	100 μF	$\pm(2.5\%+5d)$			*	*	*	*
Frequency	150KHz 10MHz	$\pm(1.2\%+2d)$			*	*	*	*
Continuity	Buzzer sounds at 100 Ω		*	*	*	*	*	*
Diode	Test current 0.3mA; Open circuit voltage 1.5V		*	*	*	*	*	*

Size(HxWxD): 205mm x 70mm x 37mm

Weight: 200g

Accessories:

Test leads, gift box with carrying case, Temperature probe(331, 333, 335 only) and Two(AAA) 1.5V batteries.



True RMS 9700T



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1,
EN: 61010-02-031

The 9700 Series are designed to measure current, voltage, resistance, temperature, capacitance, diode and continuity, etc. They offer all the features you need to fit the way you work.
9700T is True RMS AC/DC Current meter

- Large LCD display with full function indication
- Auto Power Off and Data Hold
- One touch "Auto Zero" for DCA measurements



Accessories:
K-type thermocouple probe (9701, 9703, 9700FC, 9700T only), Test leads, gift box with carrying case and 9V battery.

Features						
	9701	9702	9703	9704	9700FC	9700T
Jaw opening	0.9"	0.9"	0.9"	1.2"	1.2"	1.2"
Auto-ranging		*	*	*		
Manual-ranging	*				*	*
Auto Power Off	*	*	*	*	*	*
Data Hold	*	*	*	*	*	*
Low battery indication	*	*	*	*	*	*
AC/DC Current	*	*	*	*	*	*
True RMS						*
Temperature			*		*	*

Specifications									
Functions	Max Range	Resolution	Basic Accuracy	9701	9702	9703	9704	9700FC	9700T
Voltage DC	600V	0.1mV	±(0.8%±2d)	*	*	*	*	*	*
Voltage AC	600V	0.1mV	±(1.5%±3d)	*	*	*	*	*	*
Current DC	200A	10mA	±(2.5%±3d)	*	*	*			
	400A	100mA							
	600A	1A						*	*
Current AC	200A	10mA	±(3.0%±4d)	*	*	*			
	400A	100mA						*	*
	600A	1A						*	*
Resistance	2000Ω	1Ω	±(1.0%±2d)	*				*	*
	40MΩ	0.01MΩ					±(1.2%±4d)		*
Temperature	1370°C/2000°F	1°C/°F	±(3%±3d)	*		*		*	*
Diode Check				*	*	*	*	*	*
Continuity Check			<25Ω	*	*	*	*	*	*
Duty Cycle	0.1%~99.9%	0.1%	±(1.2%±2d)		*		*		
Frequency	9.999MHz	0.01Hz	±(0.8%±3d)		*		*		
Capacitance	200uF	0.1uF	±(3.5%±5d)		*	*	*		

Size(HxWxD): 9701/9702/9703: 181mm x 43mm x 30mm
9700FC/9700T/9704: 209mm x 43mm x 30mm

Weight: 9701/9702/9703: 225g
9700FC/9700T/9704: 285g

DT-9800 Series

Professional AC, AC/DC Clamp Meters

CEM

www.cem-meter.com.cn

True RMS 9800T

AC, AC/DC Clamp-on Meters offer the convenience of a current clamp with the versatility of a multimeter. They are ideal for non-invasive current measurements above a few amps and include all the popular multimeter functions/features demanded by the knowledgeable technician.

9800T True RMS Professional AC/DC Clamp Meters provides accurate voltage readings regardless of waveforms.



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1,
EN: 61010-02-031

Features

	9800T	9803	9805	9806
True RMS measurements	*			
Electronic overload protection	*	*	*	*
LCD display counts	4000	2000	4000	4000
Continuity buzzer & Diode check	*	*	*	*
Data Hold function	*	*	*	*
Peak Hold function	*	*	*	*
Auto Power Off	*	*	*	*
Low battery indication	*	*	*	*
AC/DC Current	*			

Specifications

Function	Max Range	Basic Accuracy	9800T	9803	9805	9806
Current AC	600A	$\pm(2.5\%+5d)$	*	*	*	*
Current DC	600A	$\pm(2.5\%+4d)$	*			
Voltage AC	600V	$\pm(2.0\%+4d)$	*	*	*	*
Voltage DC	600V	$\pm(1.5\%+3d)$	*	*	*	*
Resistance	40M Ω	$\pm(1.5\%+2d)$	*	2000 Ω	*	*
Capacitance	100 μ F	$\pm(3.5\%+5d)$	*		*	
Frequency	9.999MHz	$\pm(1.2\%+3d)$				*
Temperature	760°C/1400°F	$\pm(3.0\%+5d)$	*		*	
Diode test	Test current of 0.3mA, Open circuit voltage 1.5V		*	*	*	*

Size(HxWxD): 203mm x 79mm x 41mm

Weight: 185g

Accessories:

Test leads, gift box with carrying case and Temperature probe(9800T, 9805 only)





Compact AC, AC/DC Digital Clamp Meters



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1, EN: 61010-02-031



AC leakage current tester 9809 is multifunction clamp meter with very good resolution of 10uA. It is very useful for power system check and installation. With the measuring range up to 100A, this tester is great for appliance installation or for car applications

- 10uA high resolution
- Large 3³/₄ (4000 counts) LCD display
- Auto Power Off
- Shielded transformer jaw opens to 1.2"
- Max/Min, Data Hold, Low battery indication
- Overload protection



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1,
EN: 61010-02-031



Specifications

Function	Range	Resolution	Basic Accuracy
Current AC	40mA~100A	10uA~100mA	±(2.0%+3d)
Voltage AC	400V	0.1V	±(1.5%+10d)
Resistance	40~400Ω	0.1Ω	±(1.0%+2d)
Continuity Test	Threshold 40Ω, Continuity Beeper 2.5KHz		

Size(HxWxD): 209mm x 43mm x 30mm

Weight: 200g

Accessories:

Test leads, holster, gift box with carrying case, 9V battery



DT-9810 Mini AC Leakage Current Tester



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1,
EN: 61010-02-031

- Shielded transformer jaw opens to 1.2"
- 100μA high resolution
- Least affected by external magnetic field, providing wide measuring range from very small to large current
- Designed to safety standard IEC 61010-2-032: over-voltage CAT.III, 300V and pollution degree 2.
- Data hold function to allow for easy reading in dimly lit or hard-to-reach locations
- Dynamic range of 2000 counts full scale
- Auto power off

Specifications

Range	Resolution	Basic Accuracy
200mA	0.1mA	± (2.5% + 8d)
2A	1mA	± (2.5% + 8d)
200A	0.1A	± (2.5% + 8d)

Size(HxWxD): 182mm x 61mm x 34mm

Weight: 225g

Accessories:

Gift box with carrying case, 9V battery





CP-07



CP-08

CP-07/CP-08 High Resolution AC/DC Clamp-on Adaptors.

Provide non-invasive Current measurements to 40A with resolution to 10mA for DC/AC Current. The adaptors are perfect for low current automotive, industrial control or appliance repair.

Specifications

Function	Range	Output	Sensitivity	Basic Accuracy	CP-07	CP-08
Current	40A	10mV/A	0.1A/mV DC	±(3.0%+0.06A)	*	
	200A	1mV/A	1A/mV DC	±(3.5%+0.03A)	*	*
AC/DC	600A	0.1mV/A	10A/mV DC	±(3.0%+0.03A)		*

Size(HxWxD): CP-07: 181mm x 43mm x 30mm
CP-08: 209mm x 43mm x 30mm

Weight: CP-07: 225g
CP-08: 285g



Accessories:

Test leads, gift box with carrying case and 9V battery.

CP-09

Smaller sized , convenient-to-use AC current clamp-on Adaptor

CP-09 is the ideal tool to extend the current ranges for all Multimeters.

The CP-09 is a 200A AC current clamp-on Adaptor with voltage output via a standard banana inputs to be connected to multimeters.

Specifications

Function	Range	Output	Sensitivity	Basic Accuracy
Current AC	200A	1mV/A	1A/mV AC	±2%

Size(HxWxD): 80mm x 66mm x 31mm

Weight: 80g

Accessories:

Test leads and clamshell



EMC & LVD
EN: 50081-1, 50082-1
EN: 61010-1,
EN: 61010-02-031

CP-10/11

High Resolution Mini AC/DC Clamp-on Adaptors

The CP-10/11 are compatible with any Test Tool, Power Harmonics Analyzer, Oscilloscope, Multimeter, or other voltage measurement device.

Specifications

Function	Range	Output	Sensitivity	Basic Accuracy	CP-10	CP-11
Current AC/DC	2A	100mV/A	0.01A/mV AC/DC	±3.5%	*	
	80A	10mV/A	1A/mV AC/DC	±3.5%	*	
	40A	10mV/A	0.1A/mV AC/DC	±3.5%		*
	400A	1mV/A	1A/mV AC/DC	±3.5%		*

Size(HxWxD): 190mm x 70mm x 40mm

Weight: 200g

Accessories:

Test leads, gift box with carrying case and 9V battery.



CP-10



CP-11